

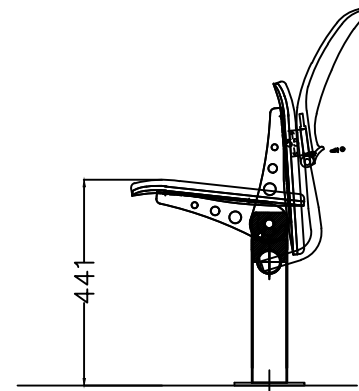
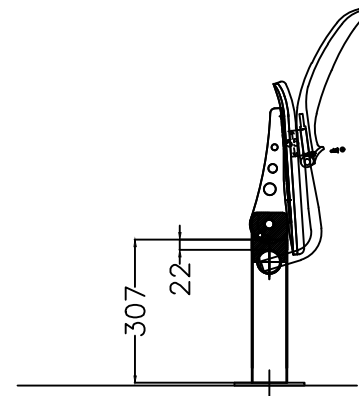


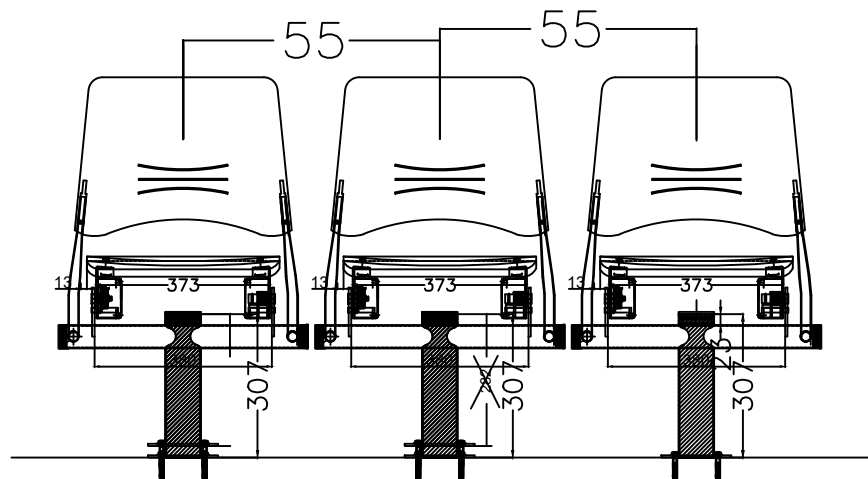

GAUSS SEATING CO., LTD.
 TAINAN SEATING CORPORATION
 GAUSS (KUNSHAN) FURNITURE LTD. CO.
 GAUSS FURNITURE L.L.C.
 GAUSS FURNITURE FRANCE

SEAT MODEL:

TM-201-N

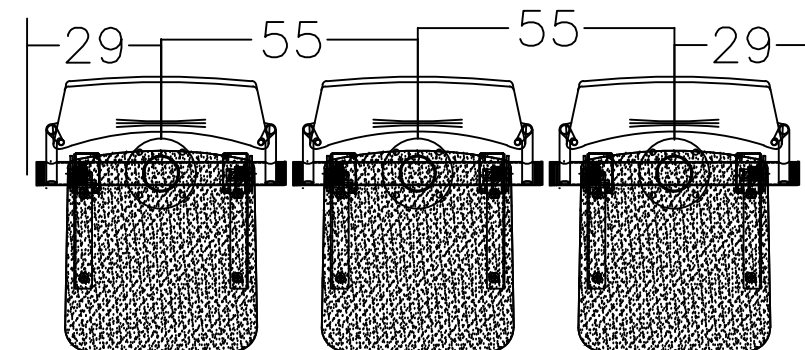

TM-201-N SPECIFICATIONS

1	P.P. chair back	Made of P.P. plastic injection molding, the color is gray or black, the quantity is 600 pieces The above can be made according to the owner's choice of color.
2	Chair elbow	Mining diameter 22*thickness 2.0*length 380mm circular steel pipe shrinks to solid After the state, then bend the pipe into one piece
3	seat cushion	Made of 12mm thick curved wood, covered with 40mm thin foam and then put on a cloth cover
4	Seat Ease receiving function	The seat cushion needs to be designed with a slow recovery function. The seat cushion can control the recovery cycle The period is 1~7 seconds/time, to avoid the elastic force being too strong during the recovery process, causing cause noise and discomfort.
5	Seat angle iron	It is formed by stamping steel plate with a thickness of 3.0mm, and the shape should be a large arc chamfer Design, touch without any sharp convex corners, safe and beautiful.
6	Seat axle cover	The steel plate with a thickness of 1.0mm is stamped and stretched into a round concave shape, and the appearance and touch feel without any Sharp convex angle, safe and beautiful.
7	Aluminum Alloy Leaf	Aluminum alloy die-casting integral molding 163*138*18.5
8	Aluminum alloy swivel seat	Aluminum alloy die-casting integral molding 60*82*18.5mm
9	Aluminum base	Aluminum alloy die-casting integral molding 64*114*16mm
10	transverse axis tube	Take Ø50.8*2.0mm round pipe, punch two holes Ø23mm and insert into the back bend pipe After positioning, welding is formed, and the back bend pipe cannot be directly welded on the horizontal The outer surface of the tube to avoid future cracks.
11	Middle tube	Adopt Ø76*2.0*263mm round tube, punch two holes Ø52mm and insert into Ø50.8mm After the horizontal tube is positioned, it is welded and formed.
12	surface coating	It is processed by high-temperature electrostatic powder coating and baking paint.
13	Cushion PVC leather	The surface of the cushion is covered with PVC leather and 40MM foam